

## Prep Tables

# TSSU-60-24M-B-ST-HC

 Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors



| Dimensions                         |                                                                        |
|------------------------------------|------------------------------------------------------------------------|
| External Width (mm)                | 1534                                                                   |
| External Depth (mm)                | 867                                                                    |
| External Height (mm)               | 1185                                                                   |
| Exclusions                         | Depth does not include 26 mm for rear bumpers. Height with lid closed. |
| Gross Volume (Litres)              | 439                                                                    |
| Supplied Shelves                   | 4                                                                      |
| Shelf Size (L x D mm)              | Two 700 x 546 + Two 700 x 349                                          |
| Internal Net Height (mm)           | 535                                                                    |
| Top Pans Supplied (depth mm)       | 24x 1/6 GN (100)                                                       |
| Unpackaged Weight (kg)             | 164                                                                    |
| Packaged Weight (kg)               | 175                                                                    |
| Packaged Dimensions (W x D x H mm) | 1601 x 940 x 1270                                                      |
| Cutting Board (L x D mm)           | 1534 x 226                                                             |
| Supplied with                      | Heavy duty lock-in-place ø 127 mm castors (158 mm height)              |

| Build                 |                                                             |
|-----------------------|-------------------------------------------------------------|
| Door Description      | 2 Solid Swing Doors                                         |
| Exterior Construction | Stainless steel front, top & hood, aluminium sides and rear |
| Interior Construction | Clear coated aluminium, stainless steel base                |
| Air Intake Position   | Front                                                       |
| Ventilation Position  | Front                                                       |
| Clearance Required    | Zero back and sides                                         |
| Cord Length (Meters)  | 3.35                                                        |
| Standard w/ Locks     | Not Standard (SPEC3 option)                                 |

| Technical               |                    |
|-------------------------|--------------------|
| Temperature Range       | 0.5 : 5°C          |
| Refrigerant             | R290               |
| Voltage/Frequency/Phase | 220-240V/50-60Hz/1 |
| Amps                    | 2.2                |
| Watts                   | 506                |
| Defrost Type            | Auto               |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com




# TSSU-60-24M-B-ST-HC


 Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors

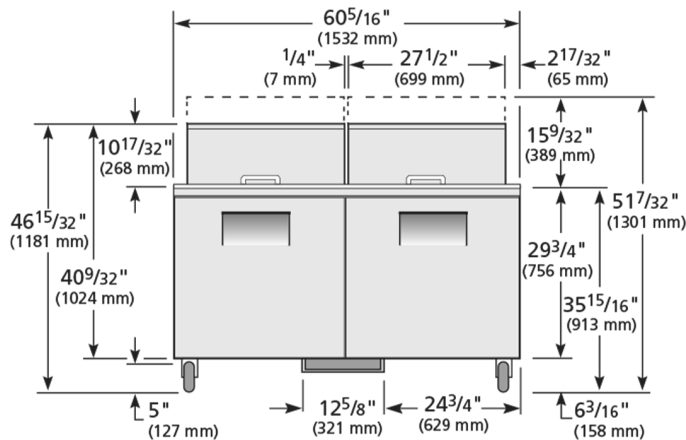

ELEVATION

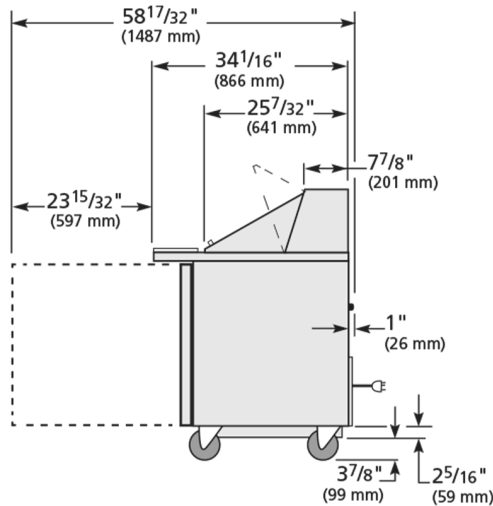

RIGHT VIEW

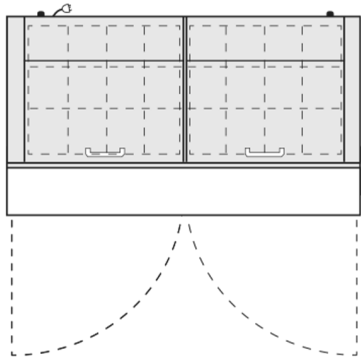

PAN LAYOUT



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

